


## BLR-2DBA DIPOLE ANTENNA

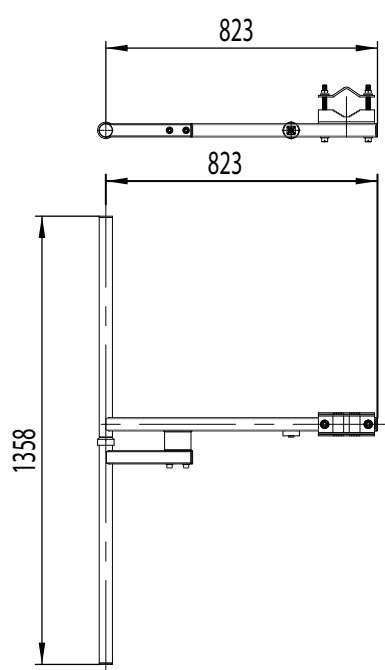

### Main information

Broad-band FM broadcasting dipole antenna used in antenna systems:

### Antenna system

Antenna system	No. of dipoles in system
BLR-2DBAx2	2
BLR-2DBAx4	4
BLR-2DBAx8	8


### RF parameters

Operating frequency	87.5-108 MHz
Polarization	Vertical
Bandwidth	20 MHz
Gain	2 dBd
Input connector	DIN 7/16 or N-female
Input impedance	50 Ohm
Input power(max.)	1 kW
VSWR	< 1.3
Weight	4 kg
Max. wind velocity	150 Km/h

### Options

- Client-defined radiation diagram on request
- Input connector

H-plane

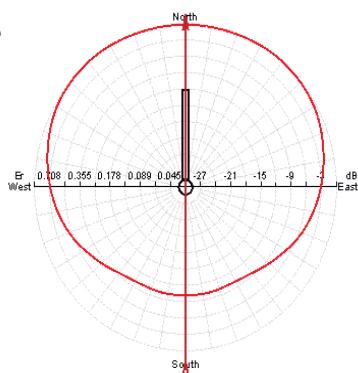

V-plane

